


like this - depending on material.

Revision #2

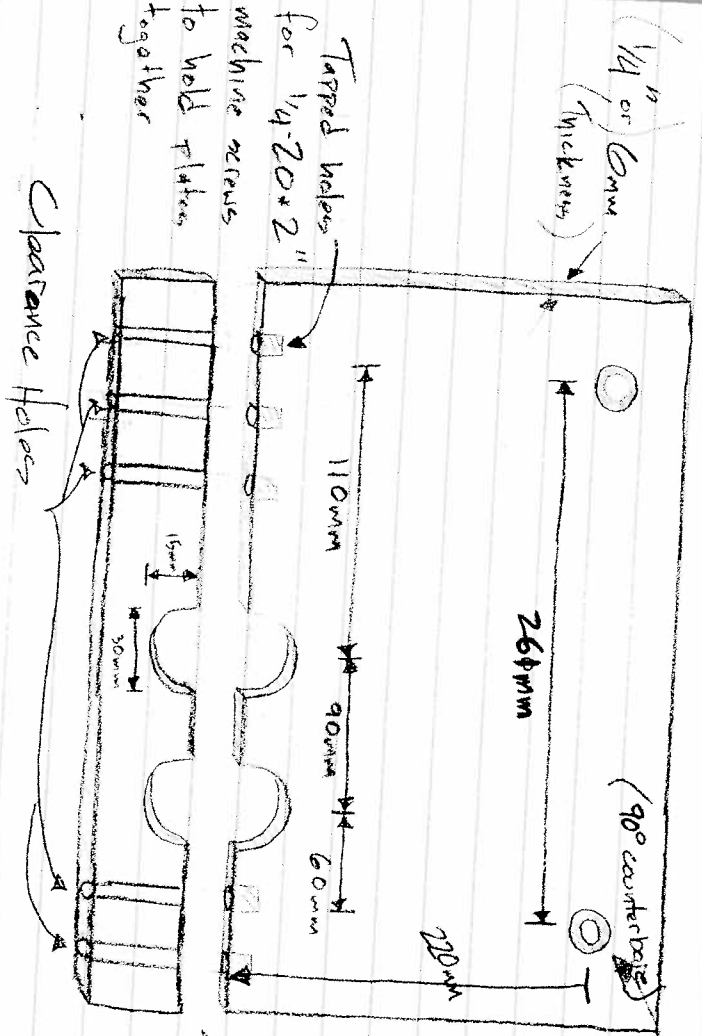

counter-bored holes so plate can be fastened to support ring with existing hardware which will sit flush.

Plate will be cut as shown no helium lines can be compressed inside holes - which will be lined with a rubber or foam material